
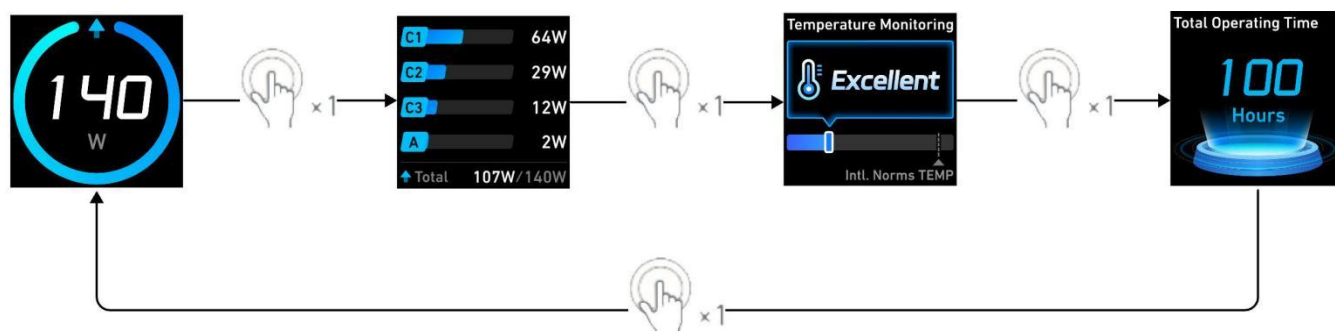





Screen Display Guide



Note: Long press to rotate screen display. Long press to rotate screen display. The screen will turn off automatically after some time without interaction.

Startup Screen		When powered on, the screen briefly shows "140W" for 3 seconds, then displays the current total power.
Power Distribution		Displays power distribution. • To refresh the power distribution interface, plug or unplug devices on any screen.
Temperature Monitoring		Low Temperature: The charger's temperature is relatively low at this time.
		High Performance: The charger's temperature rises slightly but remains well below the international standard temperature limit.
		Cooling Mode: The charger's temperature is relatively high at this time, and cooling mode is automatically activated. However, it still remains below the international standard temperature limit.
Total Operating Time		Displays the total operating time of the charger. • Activates after the charger has been in use for more than 1 hour.

Idle Screen		The charger enters idle mode when powered on if no output is detected.
Pop-Up Reminder		Using the USB-C3 and USB-A1 ports while USB-C1 and USB-C2 ports are available will trigger a pop-up reminder. • Close the reminder by plugging / unplugging ports or pressing the toggle button.

Specifications

Total Wattage	140.0W Max
Input	100-240V~, 50 / 60Hz, 2.6A Max
Output	One Port in Use: USB-C1 / USB-C2: 9.0V$\equiv$ 3.0A, 27.0W / 15.0V$\equiv$ 3.0A, 45.0W / 20.0V$\equiv$ 5.0A, 100.0W / 28.0V$\equiv$ 5.0A, 140.0W (140.0W Max) USB-C3: 5.0V$\equiv$ 3.0A, 15.0W / 9.0V$\equiv$ 3.0A, 27.0W / 15.0V$\equiv$ 2.65A, 39.75W / 20.0V$\equiv$ 2.0A, 40.0W (40.0W Max) USB-A1: 5.0V$\equiv$ 3.0A, 15.0W / 9.0V$\equiv$ 2.0A, 18.0W / 12.0V$\equiv$ 1.5A, 18.0W / 10.0V$\equiv$ 2.25A, 22.5W / 11.0V$\equiv$ 3.0A, 33.0W (33.0W Max) Two Ports in Use: USB-C1 + USB-C2: 70.0W + 70.0W USB-C1 / USB-C2 + USB-C3: 100.0W + 40.0W USB-C1 / USB-C2 + USB-A1: 100.0W + 33.0W USB-C3 + USB-A1: 24.0W Three Ports in Use: USB-C1 + USB-C2 + USB-C3: 65.0W + 45.0W + 30.0W USB-C1 + USB-C2 + USB-A1: 65.0W + 45.0W + 30.0W USB-C1 / USB-C2 + (USB-C3 + USB-A1): 100.0W + 24.0W Four Ports in Use: USB-C1 + USB-C2 + (USB-C3 + USB-A1): 65.0W + 45.0W + 24.0W Total Output: 140.0W Max

The USB-C1/C2 output port of this product is specifically designed for charging the 2021 Apple MacBook Pro (16") via a MagSafe 3 cable. To achieve the maximum power output (20VDC/5A or 28VDC/5A), ensure that the charger is connected to the 2021 Apple MacBook Pro (16") via the USB-C1/C2 output port with a compatible MagSafe 3 cable.